




Owen Oil Tools

Scalloped Gun System, 3-3/8" O.D. 6 spf, 0° System, DP, GH, BH & SDP - NT4

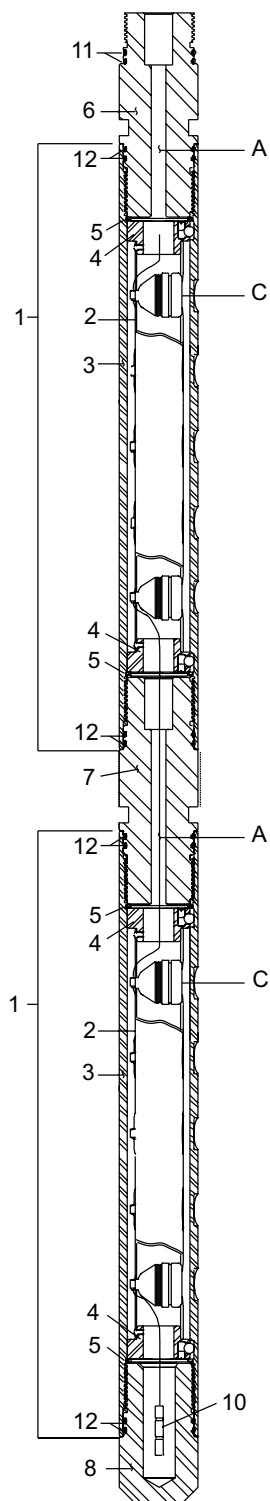


ITEM	PART NO.	DESCRIPTION
1	S33-0601-O21A	Shipping Assembly, 3-3/8" x 21', 6 spf, 0°
	S33-0601-O15A	Shipping Assembly, 3-3/8" x 15', 6 spf, 0°
	S33-0601-O11A	Shipping Assembly, 3-3/8" x 11', 6 spf, 0°
	S33-0601-O07A	Shipping Assembly, 3-3/8" x 7', 6 spf, 0°
	S33-0601-O04A	Shipping Assembly, 3-3/8" x 4', 6 spf, 0°
2	TAG-3375-293	Tube Strip, 21', 6 spf, 0°
	TAG-3375-294	Tube Strip, 15', 6 spf, 0°
	TAG-3375-287	Tube Strip, 11', 6 spf, 0°
	TAG-3375-284	Tube Strip, 7', 6 spf, 0°
	TAG-3375-286	Tube Strip, 4', 6 spf, 0°
3	TAG-3375-295	Carrier 3-3/8" x 21', 6 spf, 0°
	TAG-3375-300	Carrier 3-3/8" x 15', 6 spf, 0°
	TAG-3375-289	Carrier 3-3/8" x 11', 6 spf, 0°
	TAG-3375-296	Carrier 3-3/8" x 7', 6 spf, 0°
	TAG-3375-288	Carrier 3-3/8" x 4', 6 spf, 0°
4	TAG-3375-135U	End Plate TCP (1)
	TAG-3375-135UP	End Plate TCP w/pin (1)
5	TAG-3375-076	Carrier Snap Ring (N-5000-262) (2)
6	TAG-3375-280	Top Sub 3-3/8" Adapts to TCP or Wireline Systems
7	TAG-3375-281	Tandem Sub 3-3/8"
8	TAG-3375-078	Bull Plug 3-3/8"
	TAG-3375-078S	Bull Plug 3-3/8" w/2-3/8" EUE pin on bottom
--	TCP-0100-275	Booster Transfer Kit, Universal -3-1/3, 3-3/8 & 4" TAG
	TAG-0100-040	Insert (Included w/ Transfer Kit) see page con-1.0
10	DET-0010-001	Detonating Cord End Cover
11	OOO-N569-230	O-Ring, #230, 90 Duro Nitrile - see ref. section
	OOO-V569-230	O-Ring, #230, 90 Duro Viton - see ref. section
11A	OB-230-2817-4PE	O-Ring Backup, PEEK
12	OOO-N569-231	O-Ring, #231, 90 Duro Nitrile - see ref. section
	OOO-V569-231	O-Ring, #231, 90 Duro Viton - see ref. section
12A	OB-231-2871-4PE	O-Ring Backup, PEEK
A	A578010	Detonating Cord, 80 gr., RDX, LS - see ref. section
	A571010	Detonating Cord, 80 gr., HMX, LS - see ref. section
--	DET-3050-429	Bi-Directional Booster
C	*SDP-3125-311NT4	Charge, RDX, SDP - NT4 - SUPER HERO™
	*SDP-3125-411NT4	Charge, HMX, SDP - NT4 - SUPER HERO™
	SDP-3375-311NT	Charge, RDX, SDP
	SDP-3375-511NT3	Charge, HNS, SDP, HERO™
	TAG-3375-311	Charge, RDX, DP/GH
	TAG-3375-311L	Charge, RDX, DP
	TAG-3375-311SL	Charge, RDX, DP
	TAG-3375-301	Charge, RDX, BH

Note: 4 spf System qualified Dry, 6 spf System qualified in Fluid Only.




Owen Oil Tools

Scalloped Gun System, 3-3/8" O.D. 6 spf, 0° System, DP, GH, BH & SDP - NT4



SPECIFICATIONS

PRESSURE RATING (STANDARD)	144.8 Mpa	21,000 psi
PRESSURE RATING (HIGH PRESSURE)	193.0 Mpa	28,000 psi
TEMPERATURE	UP TO 260°C	UP TO 500°F
TENSILE STRENGTH	89,000 kg	200,000 lbf
CARRIER THREAD	2-13/16" - 6 ACME	
GUN WEIGHT LOADED	22.0 kg/m	15.0 lb/ft
TORSIONAL YIELD	8 000 N•m	5,900 lb-ft

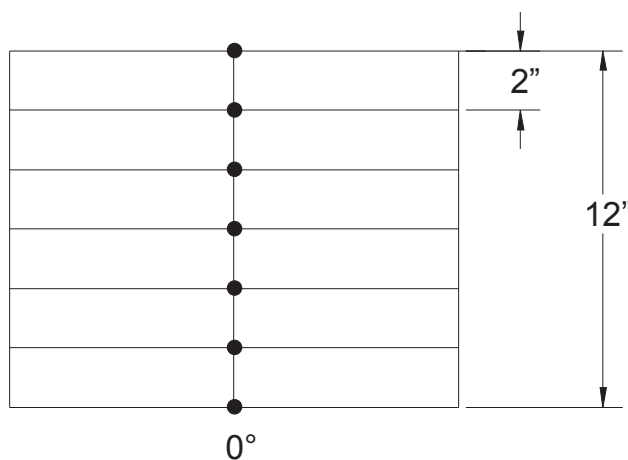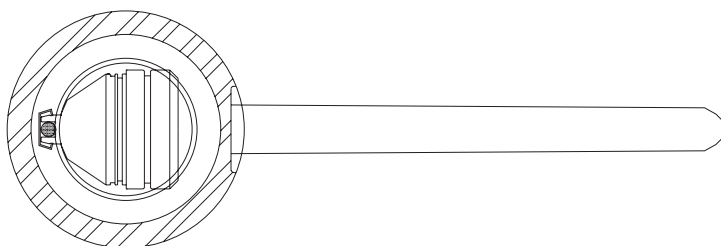

Note: Guns are available in standard lengths from 2 through 21 ft.

Gun lengths in increments of 0.5 ft are available by special order only.

Charges and ancillary components for higher temperature applications are available by Special Order.