


Application

Temperature resistant bi-directional booster for oilfield use.

Sensitivity

Booster to booster transfer at air gap of max. 60 mm (2.36")

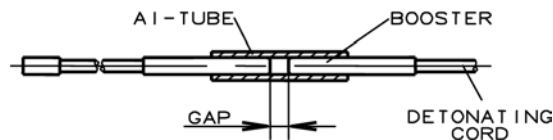


Detonating cord to booster transfer at air gap of max. 2 mm (0.08")

Explosives

HNS 600mg 9.25 grains

Output

Dent in a steel plate of min. 0.55 mm (0.021")

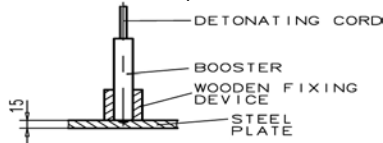


Shelf Life

2 years according to CE regulations 5 years at storage conditions of +5°C (+41°F) to +30°C (86°F) and maximum 65% relative humidity with good ventilation.

Disposal

Boosters should be destroyed only by authorised persons, and in accordance with all applicable laws, regulations, and company procedures.

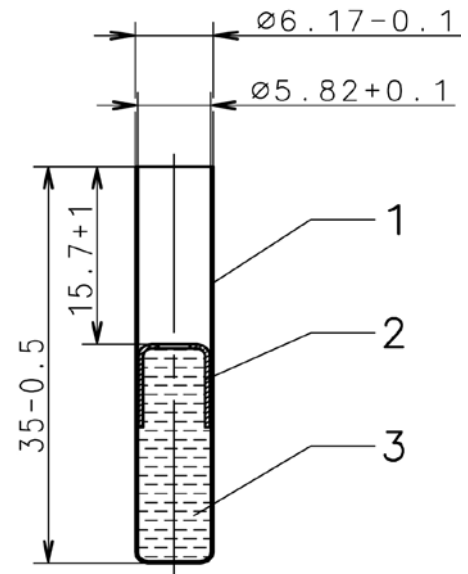

- 1. Sleeve
- 2. Inner Sleeve
- 3. Charge

All Dimensions in mm

Part Number	Package	Classification	CE Number	UN Number	D.O.T.
2505998	200 pcs	1.4S	0080.EXP.98.0028	0349	EX-9409083
2313245	100 pcs	1.4S	0080.EXP.98.0028	0349	EX-9409083
2505683	50 pcs	1.4S	0080.EXP.98.0028	0349	EX-9409083

Temperature Resistance

Temperature in °C	Temperature in °F
250 °C / 1hr	482 °F / 1 hr
230 °C / 100hr	446 °F / 100 hr

Packing Information

Quantity per box	50 pcs	100 pcs	200 pcs
Gross weight per box	1.42 kg	1.47 kg	1.58 kg
Net weight per box	0.06 kg	0.11 kg	0.22 kg
NEC per box	0.03 kg	0.06 kg	0.12 kg
Dimensions of box	40cm x 39cm x 15.5cm		
Product Weight	1.1 g		
Package Type	Carton + Vacuum Bag		

+/- 5 % tolerance in weights